WORLD INTELLECTUAL PROPEI International Bu:



9605770**A**1

INTERNATIONAL APPLICATION PUBLISHED UNDER

(51) International Patent Classification 6: A61B 5/14, A61M 5/315

A1

(11) International Publication Number:

WO 96/05770

(43) International Publication Date:

29 February 1996 (29.02.96)

(21) International Application Number:

PCT/SE95/00952

(22) International Filing Date:

18 August 1995 (18.08.95)

(30) Priority Data:

9402812-3

19 August 1994 (19.08.94)

SE

(71)(72) Applicants and Inventors: SUNDSTROM, Karl, Erik [SE/CH]; 114, ch. de la Montagne, CH-1224 Chêne-Bougeries (CH). SUNDSTROM, Lars, Eric [US/FR]; 6, La Marche, F-33190 Puybarban (FR). SUNDSTROM, Hans, Olof [US/US]; 12, La Valley Lane, Newburyport, MA 01950-3449 (US).

(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: BLOOD COLLECTION, PLASMA SEPARATION, AND HIGH PRECISION PLASMA DISPENSING DEVICE

(57) Abstract

The device consists of a syringe (1) with a plunger designed as a cup (2) large enough to contain a plasma separating thixotropic gel (5) and all the heavier parts of the blood. By centrifugation the gel plug has moved to cover the heavier parts of the blood, which is trapped in the



plunger (2), leaving the plasma free in front to be dispensed from the syringe by advancing the plunger (2).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Muuritania
ΑU	Austrolia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guines	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	4L	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	u	Liechtenstein	SN	Senegal
CN	China	ŁK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Lervia	TJ	Tajikistan
DE	Germany	MC	Monaco	17	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	บร	United States of America
Fi	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon		-		

WO 96/05770 PCT/SE95/00952

Blood collection, plasma separation, and high precision plasma dispensing device.

FIELD OF INVENTION

This invention relates to an apparatus and a method for collecting a multiphase fluid such as blood and for separating and partitioning said fluid into a lighter phase and more particularly to blood collection in milliliter quantities, to plasma separation by centrifugation and to high precision plasma dispensings in microliter quantities.

BACKGROUND

Specimen collection and specimen handling is an area of very high cost, because it is very labour intensive. It is also prone to error. It subjects workers to biohazards from infectiuous agents which contaminate blood and is the area which at present is considered to be in greatest need of technological innovation and improvement.

FRIOR ART

It is clear that the solutions to many of the problems associated with specimen handling are robotisation and automation, however. presently used manual or robotic, automated or computer-controlled liquid handling and metring devices (pumps, pipettors and dilutors) are not adapted to robotic handling. Traditional very well automatically controlled liquid metering devices are heavy complex mechanisms, using reciprocating pistons in syringes connected to motor driven valves. These valves connected to liquid reservoirs via liquid carrying tubing and to sampling and delivery tips that are manipulated by robotic arms. The very high cost and complexity of such devices and the maressity for tubing exercing liquid-

2

requires that the same pump is usedfor many different liquids, bloodsamples, standards, diluents and reagents. turn This in leads to problems of carry-over and cross-contamination, further complicated by the necessity for washing (and wiping) sampling and dispensing tips before they can be introduced into any new liquid such as blood samples. standards or reagents. Rinsing and washing stations, rinsing liquids. tubing, pumps and collection reservoirs for rincing liquids, all enlarage contaminated territory, as well as adding to the size, cost and complexity of the structure. This also adds maintenance work on potentially contaminated material and increases operating costs and biohazards for the personnel. Often blood samples are received in the laboratory in tubes provided with a rubber stopper and identification marks. The liquid level of the plasma and the level of the heavier parts of the blood varies from tube to tube, for that reason traditional robotic liqid handling stations in the laboratory must be provided with expensive liquid level sensing devices for proper positionig of sampling tips. Removing the rubber stopper is the first step in a chain of manipulations which constitute bio-hazard risk. In many cases manual or robotic distribution of aliquots of sample are done into open containers or cups, that in turn are to be distributed to different analysis stations. In these and similar operations the direct reencification with the original label on the received sample tube is not always positively secured.

OBJECT OF THE INVENTION

improved blood specimen collection, plasma separating and plasma dispensing device avoiding the aforementioned drawbacks.

It is a further object of the present invention to provide an an integral specimen collection and plasma dispensing device that easily and costeffectably can be handled by robotic manipulation, thus permitting and simplifying total automation of specimen handling.

It is a further object of the present invention to provide a plasma dispensing device that easily and safely can be handeled manuelly.

It is a further object of the present invention to provide an integral blood specimen collection, plasma separating and plasma dispensing device, that is low in cost and disposable.

It is a further object of the present invention to compleatly eliminate the transfer of the original sample from the original collection device for delivery of precise quantities of plasma in the volume range required by clinical chemistry analysis, thereby eliminating many of the problems in prior art devices described earlier.

It is a further object of the present invention to compleatly eliminate the need for liquid level sensing devices in dedicated analytical instruments or robotic workstations.

It is a further object of this invention to provide a plasma dispensing device that compleatly eliminates cross contamination.

It is a further object of this invention to guarantee positive identification of every plasma dispensing performed, by the fact that the dispensing is done by the one and same original device as it was collected in.

It is a further object of this invention to reduce the biohazard to tersonnel in the laboratory, by the fact that the sample is kept in and manipulated and translocated in a closed container.

SUMMARY OF THE INVENTION

In accordance with these and other objects are accomplished by an apparatus as outlined in claim 1 a preffered embodyment of the invention the integral specimen collection, plasma separation and high precision plasma dispensing devise consists of a syringe with a plunger designed as a cup and beeng provided with a ring shaped part with a self tapping screw working in the syringe when said cup is large enough to contain a plasma rotated. separating thixotropic gel and all the parts of the blood heavier them the plasma. The ring shaped part on its back side may have spoakes for engagement to turning devises. The syringe is evacuated, and it is filled like any other known evacuated specimen collection tube through a rubber The plasma separation is performed centrifugation of the syringe. The heavier parts of the

blood is trapped in the plunger behind the gel plug, which by force created by centrifugation has moved from the bottom of the cup towards its top, thus leaving the plasma in front of the plunger free to be dispensed from the syringe when the plunger is advanced. Plasma dispensing is done through dispensing device after penetrating the rubberstopper. The size and the high precision of the volume dispensed may be controlled by the angular movement of the plunger, which works as an internal micrometer screw inside the syringe.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig 1 shows a cross section of the evacuated blood collection device empty except for a volume of thixotropic gel at the bottom.

Fig 2 shows a cross section of the device equiped with a needle and filled with blood.

Fig 3 shows a cross section of the device after centrifugation.

Fig 4 shows a cross section of the devise equipped with a delivery tip.

Fig 5 shows the device of Fig 1 provided with a linearly movable plungerrod 19.

DETAILED DESCRIPTON OF THE DRAWINGS.

Refering to fig 1 of the drawings, that shows a cross

section the blood-collection device unfilled, it will be seen that the device consists of a plastic syringe 1 equipped with a plunger 2 that is shaped like a deep cup. This cup is pressfitted into an other plunger 3, which is equipped with a self tapping scew thread 4 threading the syringe 1. The plunger-cup 2 is partly filled with a gel-like thixothropic agent 5 of the type in common practise to separate the plasma from the rest of the blood. The syringe is provided with a rubber stopper 6. The plunger 3 is equipped with blade-like radially oriented spoakes 7 for engagement to turning devices.

Referring to fig 2 of the drawings which showes the blood-collection device equipped with a hypodermic needle 8 fitted onto a valve containing adaptor 9 (eqiped with a needle 10) for multiple prelevment of a type used in common praxis by the profession. The needle 10 is shown penetrating the rubberstopper 6. The syringe is filled with blood 11.

Refering to fig 3 of the drawings which shows the syringe with the needle 8 and adaptor assembly 9 of fig 2 removed. It also shows the rearrangement of the content of the syringe after an appropriate time and speed of centrifugation. The gel-like agent 12 separates the plasma 13 free from the heavier parts of the blood 14 trapped inside the plunger cup 2 behind the gel plug which has moved from the bottom of the cup towards the top.

Refering to fig 4 of the drawings which shows the syringe 1

WO 96/05770 PCT/SE95/00952

equipped with with a plastic tip 15 fitted onto a dispensing device 9 whose needle 10 penetrates the rubber-stopper 6. 16 indicates the thread tapped in the plastic body of the syringe 1 by the rotated part 3, which is shown advanced to a new position with reference to its position in fig 3.

Referring to fig 3 of the drawings, that shows the device of fig 1 provided with a linearly movable plunger rod 19.

WO 96/05770 B PCT/SE95/00952

CLAIMS:

1. An apparatus for collecting a multiphase fluid such as blood and for separation and partitioning said fluid into a lighter phase and a heavier phase, comprising

- a syringe (1) being open at one end (17) and having an opening (18) at the other end for recieving a hypodermic needle (8) or a dispensing device respectivly, a plunger (2) being shaped like a cup and being partly filled with gel-like thisotropic agent (5).
- 2. The apparatus of claim 1, wherein said syringe (1) is evacuated and said opening (18) at said other end is provided with a rubber stopper (6).
- 3. The apparatus of claim 2, wherein means (3,4) are provided to prevent said plunger (2) from moving into said evacuated syringe (1).
- 4. The apparatus of claim 3, wherein said means consists of a ring shaped part (3), said part being pressfitted into said plunger (2) and being provided with a self-tapping screw (4).
- 5. The apparatus of claim 4, wherein said ring shaped part (3) is provided with engagement means (7) for rotating said part (3).


WO 96/05770 PCT/SE95/00952


- 6. The apparatus of claim 5, wherein said ring shaped part
- (3) is provided with spokes (7) for engaging motoric means.
- 7. The apparatus of claim 1, wherein means (19) is provided for moving said plunger (2).
- 8. The apparatus of claim 1, wherein said plunger (2) is provided with a sealing lip (20) around its open end.
- 9. A method for collecting a muliphase fluid such as blood and for separating and partitioning said fluid into a lighter phase and a heavier phase and for dispensing said lighter phase onto a sample means, such method comprising the steps of


sucking said fluid into a syringe according to claim 1, centrifugating said fluid in said syringe,

dispensing said lighter phase from said syringe onto said sample means.

10. The method of claim 9, wherein said dispensing step is accomplished by motoric means.

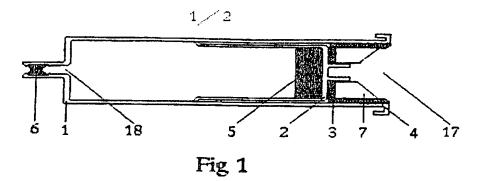

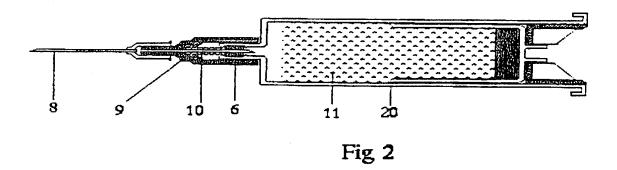

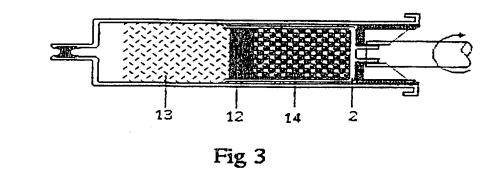





Fig 4

2/2

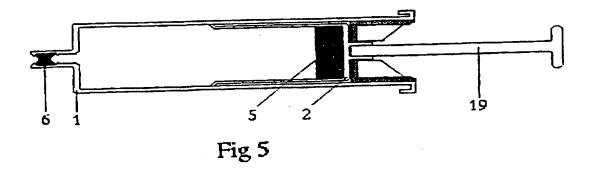

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 95/00952

		PCT/SE 95/0	0952	
A. CLA	SSIFICATION OF SUBJECT MATTER			
According	A61B 5/14, A61M 5/315 to International Patent Classification (IPC) or to both	national classification and IPC		
	DS SEARCHED			
Minimum	documentation searched (classification system followed	by classification symbols)		
· · · · · · · · · · · · · · · · · · ·	A61B, A61M		p. 1.1.1111	
1	ation searched other than minimum documentation to	the extent that such documents are included i	n the fields searched	
SE,DK,	FI,NO classes as above			
Electronic	data base consulted during the international search (nai	me of data base and, where practicable, searc	h terms used)	
WPI, C	LAIMS			
C. DOC	UMENTS CONSIDERED TO BE RELEVANT			
Category*	Citation of document, with indication, where a	ppropriate, of the relevant passages	Relevant to claim No.	
A	WO 9100114 A1 (ULTRADENT PRODUC 10 January 1991 (10.01.91),		1-10	
A	EP 0363485 A1 (TERUMO KABUSHIKI 18 April 1990 (18.04.90), p line 15 - line 20, figure 1	age 7,	1-10	
A	WO 9002516 A1 (SAFE-TEC CLINICA 22 March 1990 (22.03.90), p line 12 - line 27, figure 3	age 17,	1-10	
A	US 3886928 A (WALTER SARSTEDT), (03.06.75), page 7, line 13	3 June 1975 - line 21, figure 9	1-10	
			ļ	
X Furthe	er documents are listed in the continuation of Bo	x C. X See patent family annex.		
"A" docume	categories of cited documents: nt defining the general state of the art which is not considered	T later document published after the inter- date and not in conflict with the applica- the principle or theory underlying the in-	ition but cited to understand	
"E" ertier do	to be of particular relevance The effer document but published on or after the international filing date "X" document of particular relevances the claimed invention cannot be			
special r "O" documen	establish the publication date of another citation or other reason (as specified) at referring to an oral disclosurs, use, exhibition or other	"Y" document of particular relevance: the considered to involve an inventive step	when the document is	
"P" documen	means document published prior to the international filing date but later than the priority date claimed combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family			
	actual completion of the international search	Date of mailing of the international se		
21 Dans	whom 1995	2 2 -12- 199	5	
	nber 1995 mailing address of the ISA/	Authorized officer		
Box 5055,	Patent Office S-102 42 STOCKHOLM Io. + 46 8 666 02 86	Thomas Skagersten Telephone No. +46 8 782 25 00		
		,p	1.	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 95/00952

	101/32 33/	37 0033E	
C (Continu	ation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim	
A	EP 0265876 A2 (HABLEY MEDICAL TECHNOLOGY CORPORATION), 4 May 1988 (04.05.88), column 3, line 34 - line 53, figures 1,2	4	
		1	
i			
l			
į		Ì	
		1	
	•		
ļ			
1			
1		•	
1			
Ì			

INTERNATIONAL SEARCH REPORT Information on patent family members

11/12/95

International application No.
PCT/SE 95/00952

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
₹0-A1-	9100114	10/01/91	AU-B- 640668 AU-A- 5857790 CA-A- 2063410 EP-A,A- 0478661 US-A- 4986820	17/01/91 24/12/90 08/04/92
EP-A1-	0363485	18/04/90	DE-D,T- 3851329 AU-B,B- 609841 AU-A- 1953788 JP-A- 63315033 US-A- 5201794 WO-A- 8810414	09/05/91 19/01/89 22/12/88 13/04/93
 #0-A1-	9002516	22/03/90	AT-T- 120348 AU-A- 4314589 DE-D,T- 68921985 EP-A,B- 0435908 US-A- 5065768	02/04/90 03/08/95 10/07/91
US-A-	3886928	03/06/75	CA-A- 1012023 CH-A- 548765 DE-A- 2034457 DE-A,B,B 2150884 DE-A,B,B 2245584 FR-A,A- 2157473 GB-A- 1390623 NL-A- 7213918 BE-A,A- 789954	15/05/74 17/02/72 19/04/73 21/03/74 01/06/73 1 16/04/75 3 17/04/73
 EP-A2-	0265876	04/05/88	DE-A- 3783709 US-A- 4710179	44 4 407